

JST Connector compatibility

crimp/IDC








An **Insulation Displacement Connector (IDC)** which is also known as **Insulation Piercing Contact (IPC)**, is an electrical connector designed to be connected to the conductor of an insulated cable by a connection process which forces a selectively sharpened blade through the insulation, bypassing the need to strip the insulation conductors before connecting.



Pitch (mm)	Header	Housing	
		Crimp	IDC
1	SH	SH	SR
1.5	ZH	ZH	ZR
2	PA	PA	PAF
2	PH (LIF type)	PH (LIF type)	CK
2	PH	PH	KR
2	PH	PH	KRD
2	PH	PH	CR
2.5	XH	XH	BR
2.5	XH	XH	NR
2.5	XH	XH	NRD
2.5	EH	EH	HR
3.96	VH	VH	VR
3.96	VR	VH	VR
3.96	VS	VH	VR

Pitch (mm)	Board in housing	
	Crimp	IDC
1.5	SZN	ZA
2	SJN	DD
2	SJN	DS
2	SZN	DA
2.5	SCN	DB

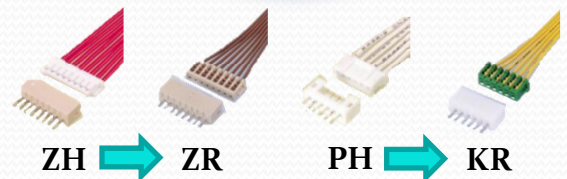

JST
France S.A.S.
☎ 0033 (0)3 26 72 45 03

Contact us for more information.
✉ marketing@jst.fr