





CONNECTOR	TYPE	PITCH (mm)	CURRENT RATING	VOLTAGE RATING	SURFACE MOUNTABLE TYPE / THROUGH HOLE	SIDE / TOP ENTRY	LOCKING TYPE	N° CIRCUITS	FFC / FPC THICKNESS
FVXL	ZIF	0.2	0.2A	50V	SMT	Side	Flip lock	45-71	0,15 mm
FVX	ZIF	0.2	0.2A	50V	SMT	Side	Flip lock	21-77	0.2 mm
FVXS	ZIF	0.2	0.2A	50V	SMT	Side	Flip lock	51	0.2 mm
FGEM	ZIF	0.25	0.2A	50V	SMT	Side	Flip lock	17-51	0.2 mm
FXM	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	80	0.2 mm
FXR	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	11-61	0.2 mm
FXRH	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	21-61	0.2 mm
FXS	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	17-51	0.2 mm
FXV	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	11-51	0.2 mm
FXVL	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	11-51	0.2 mm
FXW	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	25-29	0.12 mm
FXY	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	15-81	0.2 mm
FXZ	ZIF	0.3	0.2A	50V	SMT	Side	Flip lock	15-73	0.2 mm
FXZT	ZIF	0.3	0.2A	50V	SMT	Top	Easy- in	17-39	0.2 mm
FHH	ZIF	0.5	0.5A	50V	SMT	Side	Flip lock	10-60	0.3 mm
FHS	ZIF	0.5	0.5A	50V	SMT	Side	Flip lock	3-9	0.2 mm
FHSY	ZIF	0.5	0.5A	50V	SMT	Side	Flip lock	4-28	0.3 mm
FHY	ZIF	0.5	0.5A	50V	SMT	Side	Flip lock	10-60	0.3 mm
FKZ	ZIF	0.5	0.5A	50V	SMT	Side	Easy- in	5-32	0.3 mm
FLH	ZIF	0.5	0.5A	50V	SMT	Side	Easy- in	4-40	0.3 mm
FLS	ZIF	0.5	0.5A	50V	SMT	Side	Easy- in	6-30	0.3 mm
FLZ	ZIF	0.5	0.5A	50V	SMT	Side	Easy- in	6-50	0.3 mm
FLZT	ZIF	0.5	0.5A	50V	SMT	Top	Easy- in	6-42	0.3 mm
FLZX	ZIF	0.5	0.5A	50V	SMT	Side	Flip lock	18-50	0.3 mm
FMZ	ZIF	1.0	0.5A	50V	TH	Top & Side	Easy- in	6-30	0.3 mm
FPZ	ZIF	1.0	0.5A	50V	SMT	Side	Flip lock	7-25	0.3 mm
FAZ	ZIF	1.0	1A	50V	SMT	Top & Side	Easy- in	8-26	0.3-0.5 mm
FOX	ZIF	1.25	1.5A	12V	TH	Top & Side	Easy- in	10	0.3 mm
FDZ	ZIF	2.54	1A	250V	TH	Top & Side	Easy- in	5-19	0.125 mm
FZ	NON ZIF	0.4	0.5A	50V	SMT	Side	-	5-24	0.3 mm
FZA	NON ZIF	0.4	0.5A	50V	SMT	Side	-	5-24	0.3 mm
FZC	NON ZIF	0.4	0.5A	50V	SMT	Top	-	10-20	0.3 mm
FCH	NON ZIF	0.5	0.3A	50V	SMT	Side	-	10-51	0.33 mm
FY	NON ZIF	0.5	0.3A	30V	SMT	Top & Side	-	30-50	0.3 mm
FH	NON ZIF	0.5	0.5A	50V	SMT	Side	-	5-25	0.3 mm
FHA	NON ZIF	0.5	0.5A	50V	SMT	Side	-	5-30	0.3 mm
FHJ	NON ZIF	0.5	0.5A	50V	SMT	Side	-	4-24	0.3 mm
FLT	NON ZIF	0.5	0.5A	50V	SMT	Top	-	6-40	0.3 mm
FM	NON ZIF	1.0	0.5A	50V	TH	Top & Side	-	3-12	0.33 mm
FMN	NON ZIF	1.0	0.5A	50V	SMT / TH	Top & Side	-	4-40	0.3 mm
FMS	NON ZIF	1.0	0.5A	50V	SMT	Side	-	3-14	0.3 mm
FUN	NON ZIF	1.0	1A	50V	TH	Top	-	13	0.1 mm
FFS	NON ZIF	1.25	0.5A	50V	SMT	Side	-	4-26	0.3 mm
FE	NON ZIF	1.25	1A	200V	TH	Top & Side	-	4-40	0.3 mm




Flip lock locking type

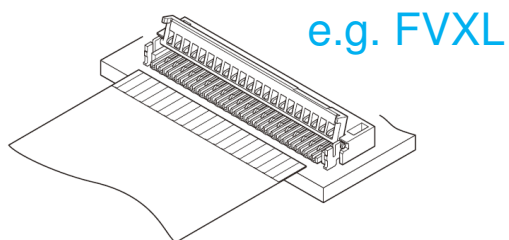


Easy- in locking type

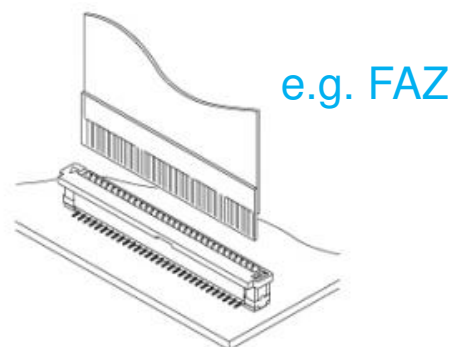


Top Entry Type

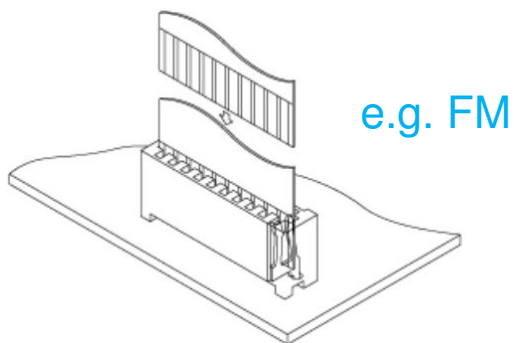

Side Entry Type

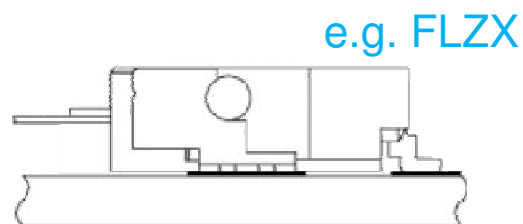

Through Hole Type

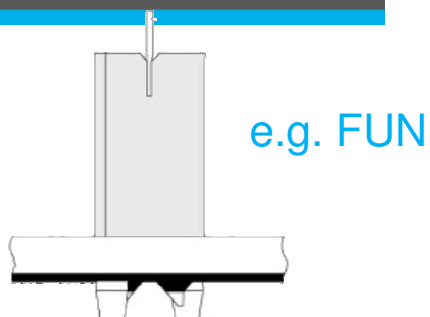

Surface Mountable Type

